

H-805

油位观察窗

材料

- 主体-铝合金6061-T6原色光亮的表面处理.
- 液位分割器-铝合金与主体一体成型.
- 观察窗-有机玻璃.
- 观察窗固定环-黄铜制.
- 玻璃密封环-丁腈橡胶NBR.

螺纹密封圈

- 丁腈橡胶NBR85° ,以黑色为主要颜色.

最高连续工作温度

-40° C - 100° C.

技术信息

- 螺纹密封圈符合DN3869标准.



Oil Sight Glass

Material

- Body-Aluminum6061-T6,mill lfinished.
- Reflector-Aluminum with the body is one part.
- Window-Plexiglass.
- Window Gasket-Brass.
- Sealingr— Rubber NBR .

ThreadGasket


- ubber NBR.

MaximumContinuousWorkingTemperature

- -40℃~100℃.

Technical Information

- The thread gaskets conform to DIN3869 standard.

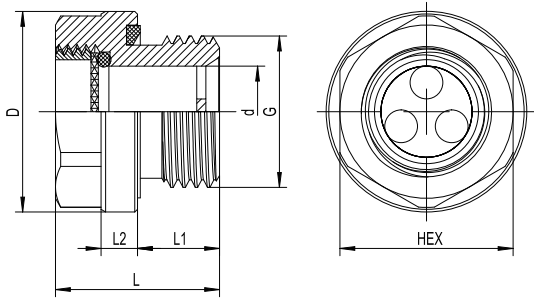

提示：尺寸“S”标注为“/”的代表此规格没有六边型.

NOTE: The size “S” marked as “/” ,that the mean is the item have not the outer hexagon

Part No.	G	D	d	L	L2	L1	HEX
805-6L	G 1/4"	20	8	18	4	9	17
805-9L	G 3/8"	22	10	18	4	9	19
805-12L	G 1/2"	28	13.5	22	4	12	23
805-16L	G 3/4"	32	20	22	4	12	26
805-22L	G 1"	40	23.5	24	4	13	34
805-28L	G 1 1/4"	50	30	24	11	13	/
805-33L	G 1 1/2"	55	38	24	11	13	/

Part No.	G	D	d	L	L2	L1	HEX
805-10F	M10x1	16	5	15	3	8	13
805-14F	M14x1.5	20	8	18	4	9	17
805-16F	M16x1.5	22	10	18	4	9	19
805-18F	M18x1.5	25	11.5	18	4	9	21
805-20F	M20x1.5	27	12.5	18	4	9	23
805-22F	M22x1.5	28	13.5	18	4	9	23
805-27F	M27x1.5	32	20	18	4	9	26
805-33F	M33x2	40	23.5	24	4	13	34
805-42F	M42x2	50	30	24	11	13	/
805-48F	M48x2	55	38	24	11	13	/