

H-SP

长条形油位观察窗

- 材料
- 主体-铝合金 6061-T6,原色光亮的表面处理.
 - 观察窗-钢化玻璃.

- 玻璃密封圈
- A型: 丁晴橡胶NBR.
 - B型: 氟橡胶FKM.

- 最高连续工作温度
- A型: -40° C ~ 100° C.
 - B型: -20° C ~ 180° C.

- 工作压力
- 最高的连续使用压力应低于1.5Mpa
 - 最高的瞬间压力应低于2.5Mpa




Oil Window

- Material
- Body – Aluminum 6061-T6, mill finished.
 - Window – Tempered glass

- Glass gasket
- Type –A: Rubber NBR.
 - Type –B: Rubber FKM.

- Maximum continuous working temperature
- Type-A: -40° C ~ 100° C.
 - Type-B: -20° C ~ 180° C.

- Working pressure
- The working pressure should be lower than 1.5 Mpa.
 - The Instantaneous pressure should be lower than 2.5 Mpa.

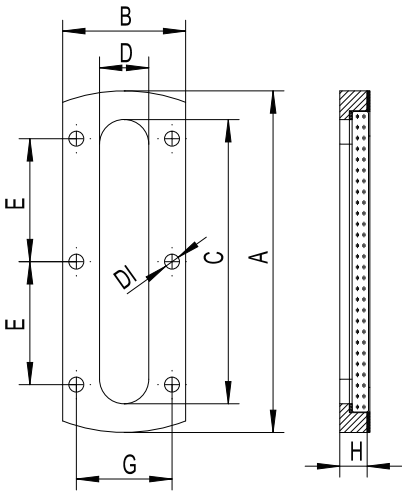

选型指南/Selection Guide:
例如/For example : H-SP3000-A or H-SP3000-B

Pr-Nr.	A	B	C	D	E	G	H	DI	Holes Nr.
SP3000	60	45	39	18	14	35	10	5.5	4
SP4000	80	45	59	18	22.5	35	10	5.5	4
SP5000	100	45	79	18	35	35	10	5.5	6
SP6000	125	45	104	18	45	35	10	5.5	6
SP7000	160	45	139	18	40	35	12	5.5	8
SP8000	200	45	179	18	40	35	12	5.5	10
SP9000	250	45	229	18	40	35	12	5.5	12