

H-SN

油位观察窗

- 材料
- 主体
 - 铝AL6061-T6,原色光亮的表面处理.

- 液位分割器
- 铝AL6061-T6,与螺纹环一体成型.

- 观察窗
- 钢化玻璃.

- 密封垫
- 玻璃密封圈:FKM,以绿色为主要颜色.
 - 螺纹密封圈:FKM,以绿色为主要颜色.

- 最高连续工作温度
- 20° C ~ 180° C.

- 工作压力
- 最高的连续使用压力应低于2.0Mpa
 - 最高的瞬间压力应低于3.0Mpa




Oil Sight Glass

- Material
- Body – Aluminum 6061, mill finished.
 - Reflector–Aluminum 6061 ,with the gasket is one part .
 - Window–Tempered glass.
 - Thread gasket– Rubber FKM gasket.

- Maximum continuous working temperature
- 20’ C ~ 180’ C.

- Working pressure
- The working pressure should be lower than 2.0 Mpa.
 - The Instantaneous pressure should be lower than 3.0 Mpa.

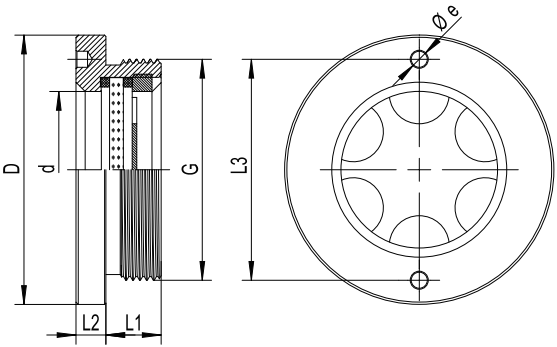

Part No.	G	D	d	L3	L2	L1	e
SN-9L	G 3/8"	22	9.1	18	4	8	2.6
SN-12L	G 1/2"	26	11.6	21.5	4	8	2.6
SN-16L	G 3/4"	32	16.1	27	4	8	2.6
SN-22L	G 1"	38	22.1	33	4.5	9	2.6
SN-28L	G 1 1/4"	48	28.1	40	4.5	10	3.2
SN-33L	G 1 1/2"	55	33.1	47.5	5	11	3.2
SN-43L	G 2"	68	43.1	60	5.5	11	4.5

Part No.	G	D	d	L3	L2	L1	e
SN-16F	M16x1.5	22	9.1	18	4	8	2.6
SN-20F	M20x1.5	26	11.6	21.5	4	8	2.6
SN-27F	M27x1.5	32	16.1	27	4	8	2.6
SN-30F	M30x1.5	36	20.1	30.5	4.5	8.5	2.6
SN-33F	M33x1.5	38	22.1	33	4.5	9	2.6
SN-36F	M36x1.5	42	25.1	35.5	4.5	9	2.6
SN-42F	M42x1.5	48	28.1	40	4.5	10	3.2
SN-48F	M48x1.5	55	33.1	47.5	5	11	3.2
SN-60F	M60x1.5	68	43.1	60	5.5	11	4.5