

H-KE

油位观察窗

- 材料
- 主体
 - 铜,原色光亮的表面处理.


- 液位分割器
- 铜, 与主体一体成型, 表面白色油墨喷涂.

- 观察窗
- 钢化玻璃.

- 密封垫
- 玻璃密封圈: 芳纶纤维纸 (无石棉纸) .
 - 螺纹密封圈: 芳纶纤维纸 (无石棉纸) .

- 最高连续工作温度
- -30℃~300℃.

- 工作压力
- 最高的连续使用压力应低于 2.0Mpa.
 - 最高的瞬间压力应低于 3.0Mpa.

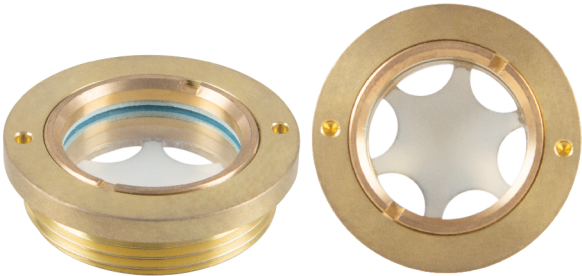


Oil Sight Glass

- Material
- Body-Brass, mil lfinished.
 - Reflector-Brass, with the body is one part, with the white paint.

- Window-Tempered glass
- Thread gasket -Aramid fiber gasket.

- Maximum Continuous Working Temperature
- -30℃~300℃.

- WorkingPressure
- The working pressure should be lower than2.0Mpa.
 - The Instantaneous pressure should be lower than3.0Mpa.

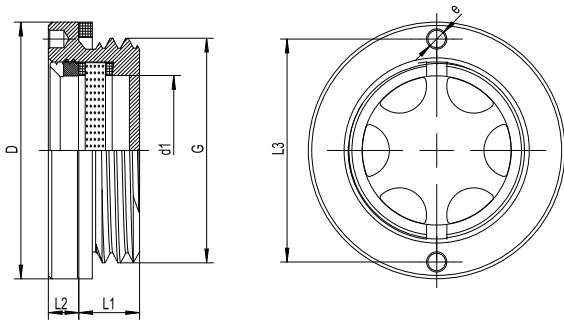

Part No.	G	D	d1	L3	L2	L1	e
KE-9L	G 3/8"	22	9.1	18	4	8	2.6
KE-12L	G 1/2"	26	11.6	21.5	4	8	2.6
KE-16L	G 3/4"	32	16.1	27	4	8	2.6
KE-22L	G 1"	38	22.1	33	4.5	9	2.6
KE-28L	G 1 1/4"	48	28.1	40	4.5	10	3.2
KE-33L	G 1 1/2"	55	33.1	47.5	5	11	3.2
KE-43L	G 2"	68	43.1	60	5.5	11	4.5

Part No.	G	D	d1	L3	L2	L1	e
KE-16F	M16x1.5	22	9.1	18	4	8	2.6
KE-20F	M20x1.5	26	11.6	21.5	4	8	2.6
KE-27F	M27x1.5	32	16.1	27	4	8	2.6
KE-30F	M30x1.5	36	20.1	30.5	4.5	8.5	2.6
KE-33F	M33x1.5	38	22.1	33	4.5	9	2.6
KE-36F	M36x1.5	42	25.1	35.5	4.5	9	2.6
KE-42F	M42x1.5	48	28.1	40	4.5	10	3.2
KE-48F	M48x1.5	55	33.1	47.5	5	11	3.2
KE-60F	M60x1.5	68	43.1	60	5.5	11	4.5