

H-60172

通气阀

材料

- 主体-铜,原色光亮的表面处理.
- 通气帽-铜,原色光亮的表面处理.
- 阀芯-氟橡胶.
- 不锈钢弹簧.

垫圈类型

- A型:丁晴橡胶 NBR 85° ,以黑色为主要颜色 .
- B型:氟橡胶 FKM 80° ,以绿色为主要颜色.
- A型和B型的垫圈符合DIN3869标准.

开启压力

- 0.05 bar~0.25 bar .

最高连续工作温度

- A型: -40° C ~ 100° C.
- B型: -20° C ~ 180° C.

可按需提供的增值附件

- 按需求替换材质.
- 其他的开启压力.

技术特性

- H-60172通气过滤阀用于微压箱体内部与外界空气进行交互的作用,一旦超过设计的开启压力,通气阀即开启为箱体泄压,从而防止箱体内部压力过大.
- 在正常情况下密封球将阀体封闭,防止污垢灰尘进入箱体.

Breather Valves

Material

- Body – Brass , mill finished.
- Breather cap – Brass , mill finished .
- Seal valves core – Brass core with Rubber FKM.
- Stainless spring.

Thread gasket

- A: Sealing ring rubber NBR 85° .
- B: Sealing ring rubber FKM 80° .
- A and B type gaskets conform to DIN3869 standard.

Working pressure

- 0.05 bar~0.25 bar .

Maximum continuous working temperature



- A: -40° C ~ 100° C.
- B: -20° C ~ 180° C.

Accessories on request

- Other materials .
- Other working pressure.

Technical Characteristics

- Breather valve H-QB are used when the air exchange is to be allowed between the inside of the container and the ambient air.
- its normal state, the seal valves core was closed the valves so prevents dirt or dust getting inside the box.

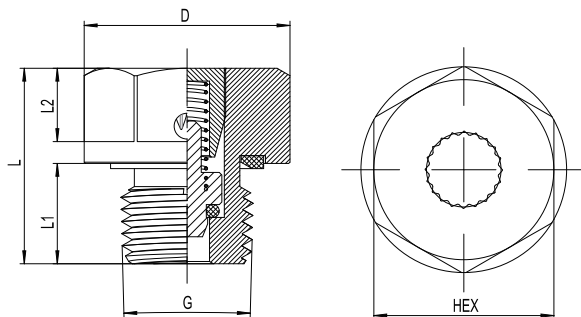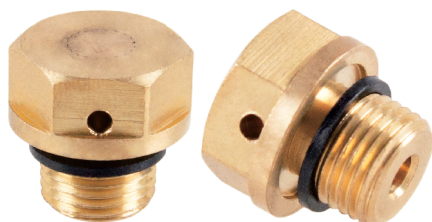

造型指南/SelectionGuide:

例如/For example: H-60172-A-6L or H-60172-B-6L

Part No.	G	D	L	L2	L1	SW
60172-6L	BSP 1/4"	20	20	5	12	17
60172-9L	BSP 3/8"	22	21	6	12	18
60172-12L	BSP 1/2"	27	24	7	14	22
60172-16L	BSP 3/4"	32	26	7	16	27
60172-22L	BSP 1"	40	28	8	16	34

Part No.	G	D	L	L2	L1	SW
60172-10F	M10x1.0	16	17	5	9	13
60172-12F	M12x1.5	18	20	5	12	13
60172-16F	M16x1.5	22	21	6	12	18
60172-22F	M22x1.5	27	24	7	14	22
60172-27F	M27x1.5	32	26	7	16	27
60172-33F	M33x2.0	40	28	8	16	34