

H-UK

油位观察窗

材料

- 主体
- 黄铜,原色光亮的表面处理.

观察窗


- 透明聚碳酸酯 PC.

最高连续工作温度

- $-40^{\circ}\text{C} \sim 100^{\circ}\text{C}$.

工作压力

- 最高的连续使用压力应低于0.8Mpa
- 最高的瞬间压力应低于1.5Mpa

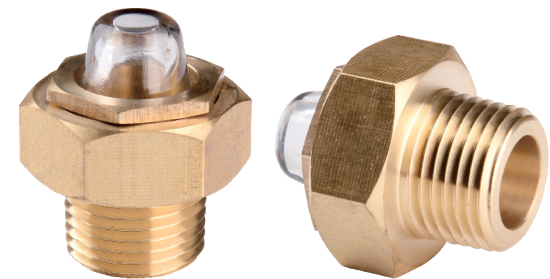

Oil Sight Glass

Material

- Body
- Brass , mill finished.

Window Glass


- Polycarbonate glass PC.

Maximum continuous working temperature

- $-40^{\circ}\text{C} \sim 100^{\circ}\text{C}$.

Working pressure

- The working pressure should be lower than 0.8 Mpa.
- The Instantaneous pressure should be lower than 1.5 Mpa.

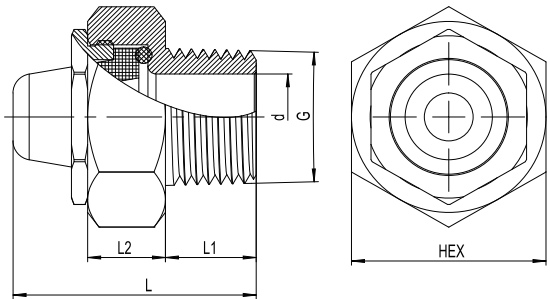

Part No.	G	L	L1	L2	d	HEX
UK-12L	BSP 1/2"	37	14	12	13.5	30
UK-16L	BSP 3/4"	37	14	12	15	35
UK-20F	M20x1.5	35	12	12	13.5	30
UK-22F	M22x1.5	35	12	12	13.5	30
UK-24F	M24x1.5	37	14	12	14	32
UK-27F	M27x1.5	37	14	12	15	35
UK-12R	NPT 1/2"	37	14	12	13.5	30
UK-16R	NPT 3/4"	37	14	12	15	35