

H-BD

通气塞


- 材料
- 主体-黄铜,本色防氧化的表面处理.
 - 通气帽-镀锌钢.

- 螺纹密封环
- 铝AL1060.(基于DIN 7603 A 标准).

- 最高连续工作温度
- -40° C~250° C.

- 可按需提供的增值附件
- 按需求替换材质.
 - 按需求增加测油杆.

- 技术特性
- H-BD通气塞用于微压箱体内部与外界空气进行交互的作用，密封的盖子可以防止污垢灰尘进入箱体.

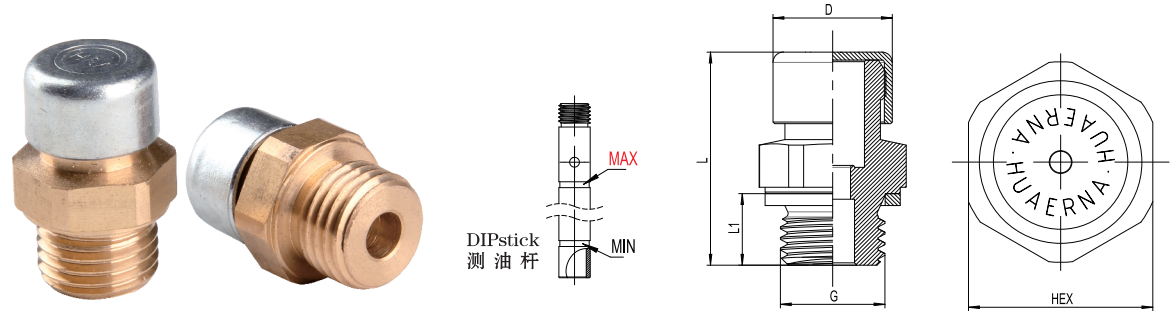

Part No.	G	HEX	L	L1	d
BD-6L	G 1/4"	24	8	15	17
BD-9L	G 3/8"	27	9	18	22
BD-12L	G 1/2"	31	11	26	27
BD-16L	G 3/4"	32	12	29	32
BD-22L	G 1"	37	15	39	40
BD-6R	NPT 1/4	27	9	15	14
BD-9R	NPT 3/8	30	10	15	17
BD-12R	NPT 1/2	32	12	18	22
BD-16R	NPT 3/4	37	15	26	29

Vent Plugs

- Material
- Body – Brass , mill finished.
 - Breather cap – Steel zinc plated .

- Thread gasket
- Aluminum Al1060.(Sealing DIN 7603A).

- Maximum continuous working temperature
- -40° C~250° C..

- Accessories on request
- Other materials .
 - Add with the dipstick.

- Technical Characteristics
- Vent plugs H-BD are used when the air exchange is to be allowed between the inside of the container and the ambient air.the cap can be prevents dirt or dust getting inside the box.

Part No.	G	HEX	L	L1	d
BD-10F	M10 x 1	24	8	13	14
BD-12F	M12 x 1.25	27	9	15	17
BD-14F	M14 x 1.5	27	9	15	19
BD-16F	M16 x 1.5	27	9	20	22
BD-18F	M18 x 1.5	27	9	20	22
BD-20F	M20 x 1.5	29	10	20	24
BD-22F	M22 x 1.5	29	10	26	27
BD-24F	M24 x 1.5	31	11	29	30
BD-27F	M27 x 1.5	31	11	29	32
BD-33F	M33 x 2	32	12	38	38
BD-36F	M36 x 2	32	12	38	40