

H-DIN908

可在高温高压下使用的内六角油塞

材料类型

- ST:钢,电镀锌,纳米钝化处理(蓝白色/黄色).
- AL:铝合金 6061-T6 ,原色光亮的表面处理.
- BR:黄铜,原色纳米钝化处理.
- SS:不锈钢,原色光亮的表面处理.

垫圈类型

- A型:不带垫圈
- B型:带铝垫圈
- C型:带芳纶纤维垫圈
- D型:组合垫片
- E型:紫铜垫圈

技术信息

- B型.C型和E型的垫圈符合DIN7603标准
- D型的垫圈符合JB982-77标准

Threaded plugs

Material

- ST:Steel, zinc plated nano-passivated (Blue colors / yellow)
- AL:Aluminum 6061-T6 , Mill finished.
- BR:Brass, nano-passivated.
- SS:Stainless Steel, Mill finished.


Gasket Type

- A: without gasket.
- B: Aluminum gasket.
- C: aramid fiber gasket.
- D:Composite gasket.
- E:Copper gasket.

Technical information

- B . C and E type gaskets conform to DIN7603 standard.
- D type gaskets conform to JB982-77 standard.

Part No.	G Size	D mm	L2 mm	L1 mm	SW mm
DIN 908-4L	BSP 1/8"	14	3	8	6
DIN 908-6L	BSP 1/4"	18	3	12	6
DIN 908-9L	BSP 3/8"	22	3	12	8
DIN 908-12L	BSP 1/2"	26	4	14	10
DIN 908-16L	BSP 3/4"	32	4	16	12
DIN 908-22L	BSP 1"	39	5	16	17
DIN 908-28L	BSP 1 1/4"	49	5	16	22
DIN 908-33L	BSP 1 1/2"	55	5	16	24

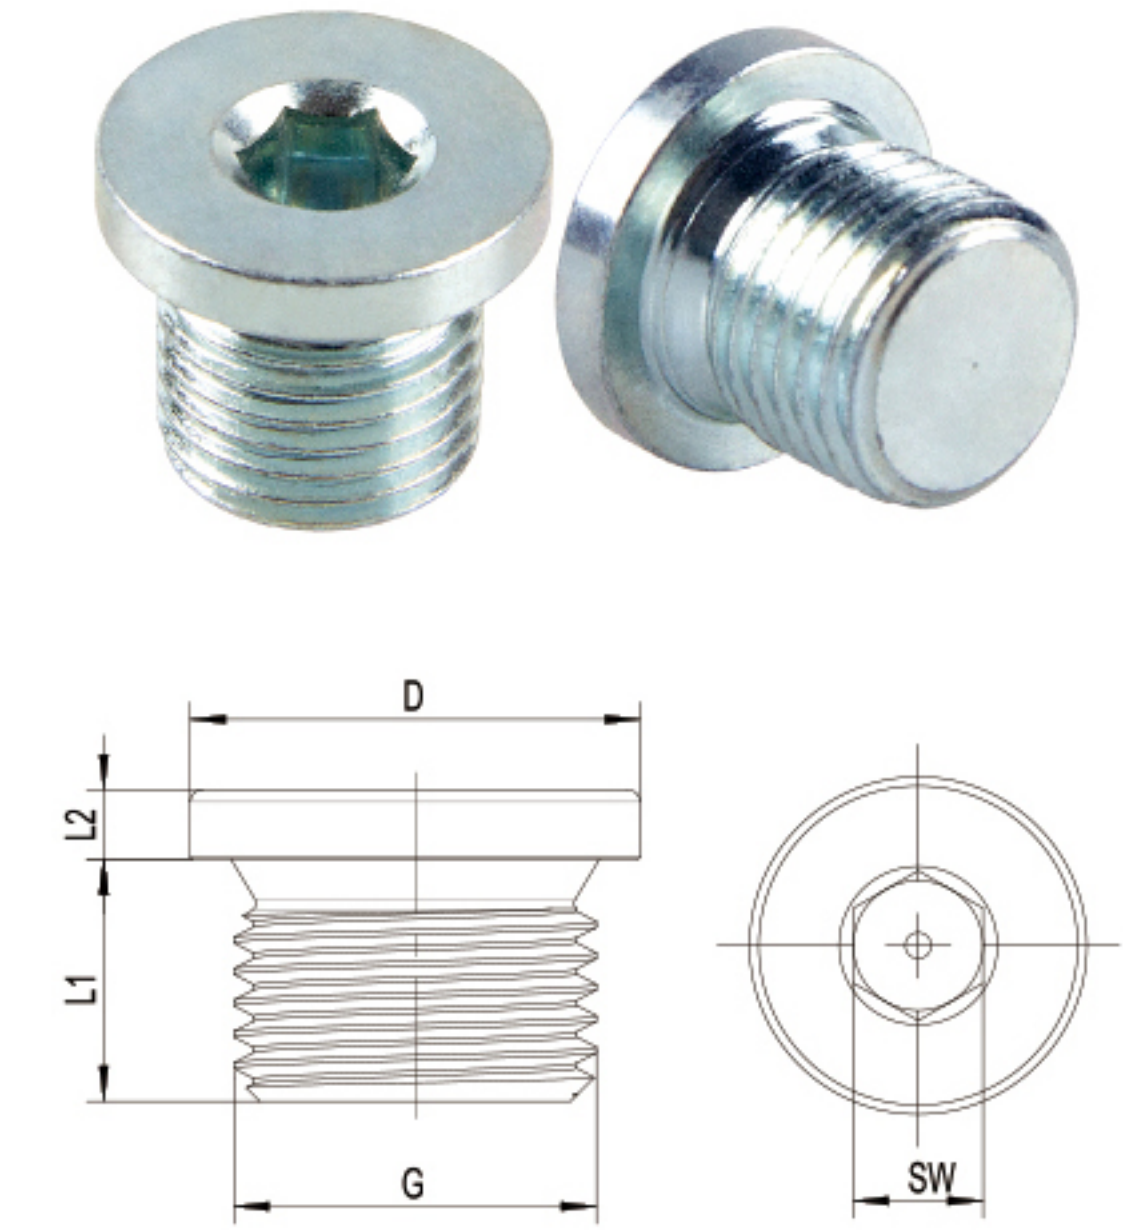

选型指南/Selection Guide:

Item	Material	Gasket Type	Size
DIN 908	ST	A	?L
	AL	B	
	BR	C	
	SS	D	?E
		E	

例如/For example : DIN 908-ST-A-12L

Part No.	G Size	D mm	L2 mm	L1 mm	SW mm
DIN 908-10F	M10x1.0	14	3	8	5
DIN 908-12F	M12x1.5	17	3	12	6
DIN 908-14F	M14x1.5	19	3	12	6
DIN 908-16F	M16x1.5	21	3	12	8
DIN 908-18F	M18x1.5	23	4	12	8
DIN 908-20F	M20x1.5	25	4	14	10
DIN 908-22F	M22x1.5	27	4	14	10
DIN 908-24F	M24x1.5	29	4	14	12
DIN 908-26F	M26x1.5	31	4	16	12
DIN 908-27F	M27x2.0	32	4	16	12
DIN 908-30F	M30x1.5	36	4	16	17
DIN 908-33F	M33x1.5	39	5	16	17
DIN 908-42F	M42x2	49	5	16	22
DIN 908-48F	M48x2	55	5	16	24