

H-8277R

原创设计

油位观察窗

材料

- 主体-铝合金6061-T6，原色光亮的表面处理.

观察窗

- 透明聚碳酸酯.

螺纹密封环

- 芳纶纤维纸（无石棉纸）.

最高连续工作温度

- -40℃~100℃.

工作压力

- 最高的连续使用压力应低于0.8Mpa.
- 最高的瞬间压力应低于1.5Mpa.

Oil Sight Glass

Material

- Body – Aluminum 6061–T6, mill finished.

Window Glass

- Polycarbonate glass.

Thread gasket


- Aramid fiber gasket.

Maximum continuous working temperature

- -40° C~100° C.

Working pressure

- The working pressure should be lower than 0.8 Mpa.
- The Instantaneous pressure should be lower than 1.5 Mpa.

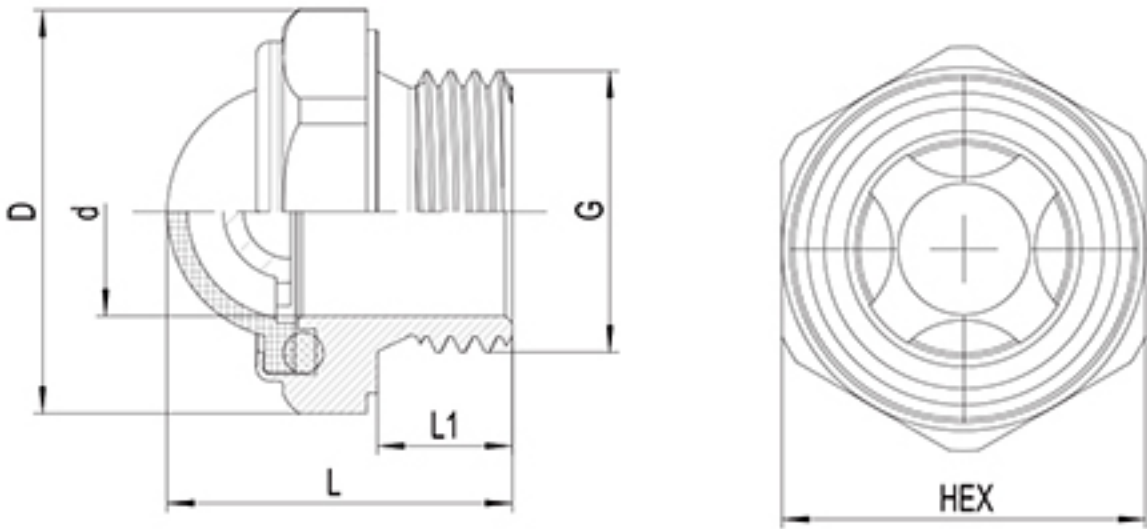

Part No.	G	L	L1	d	HEX
8277R-12L	BSP 1/2"	27	10	16	27
8277R-16L	BSP 3/4"	28	11	17	32
8277R-20F	M20x1.5	27	10	16	24
8277R-22F	M22x1.5	27	10	16	27
8277R-24F	M24x1.5	28	11	17	30
8277R-27F	M27x1.5	28	11	17	32