

H-30210

可在高温高压下使用的内六角油塞

材料类型

- ST:钢,电镀锌,纳米钝化处理(蓝白色/黄色).
- AL:铝合金 6061-T6 ,原色光亮的表面处理.
- BR:黄铜,原色纳米钝化处理.
- SS:不锈钢,原色光亮的表面处理.

垫圈类型

- A型:不带垫圈
- B型:O型圈(NBR黑色)
- C型:O型圈(FKM绿色)

Threaded plugs

Material



- ST:Steel, zinc plated nano-passivated (Blue colors / yellow)
- AL:Aluminum 6061-T6 , Mill finished.
- BR:Brass, nano-passivated.
- SS:Stainless Steel, Mill finished.

Gasket Type

- A: without gasket.
- B: O-Ring (NBR black).
- C: O-Ring (FKM green).

选型指南/Selection Guide:
例如/For example : H-30210-A-6L or H-30210-B-6L or H-30210-C□6L

Part No.	G	D	L2	L1	HEX
30310-4L	G 1/8"	14	3	8	5
30310-6L	G 1/4"	18	3	12	6
30310-9L	G 3/8"	22	3	12	7
30310-12L	G 1/2"	26	4	14	10
30310-16L	G 3/4"	32	4	16	12
30310-22L	G 1"	39	5	16	17
30310-28L	G 1 1/4"	49	5	16	22
30310-33L	G 1 1/2"	55	5	16	24
30310-2US	5/16" x24UNF	10.5	2	8	4
30310-3US	3/8" x24UNF	12.5	2.2	8	4
30310-4US	7/16" x20UNF	14.5	2.4	9.1	5
30310-5US	1/2" x20UNF	16	2.4	9.1	5
30310-6US	9/16" x18UNF	17.5	2.5	9.7	6
30310-8US	3/4" x16UNF	22.2	3.2	11.1	8
30310-10US	7/8" x14UNF	25.4	3.5	12.7	10
30310-12US	1-1/16" 212UNF	32	3.9	15.1	12
30310-14US	1-5/16" x12UNF	38.1	3.9	15.1	17
30310-16US	1-5/8" x12UNF	47.6	3.9	15.1	22

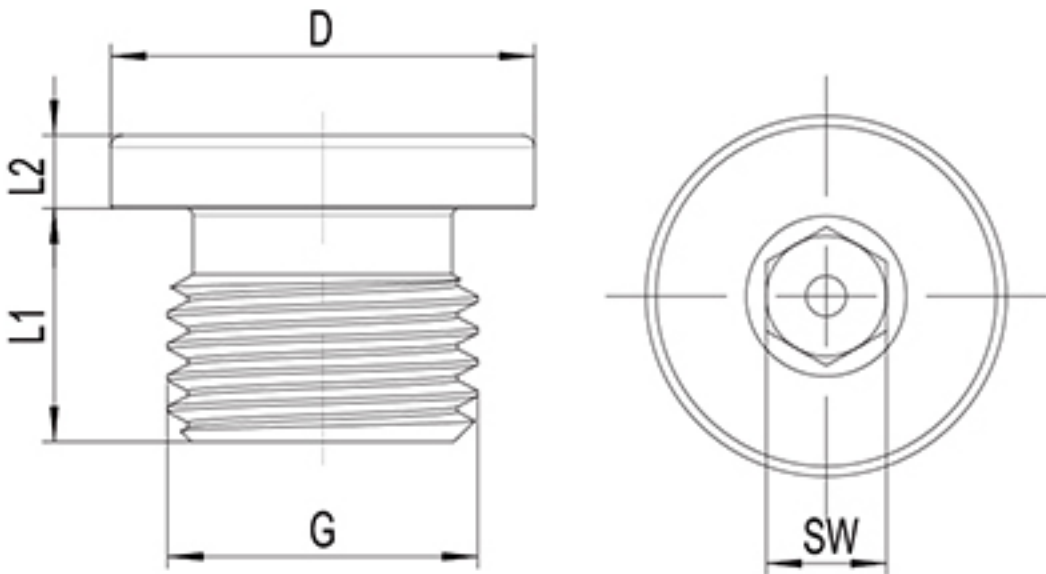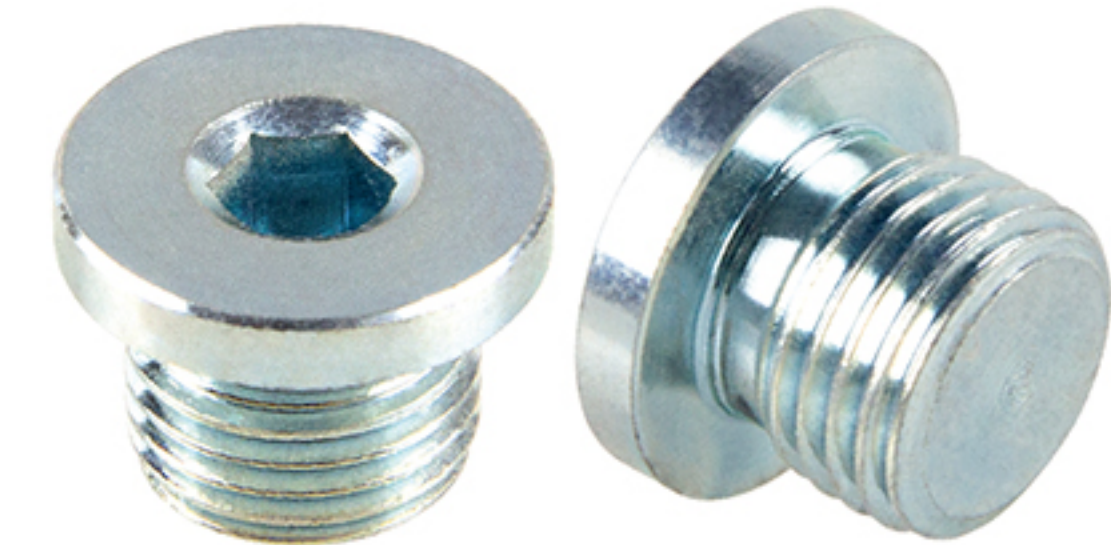

Part No.	G	D	L2	L1	HEX
30310-8F	M8 x 1	12	3	8	4
30310-10F	M10 x 1	14	3	8	5
30310-12F	M12 x 1.5	17	3	12	6
30310-14F	M14 x 1.5	19	3	12	6
30310-16F	M16 x 1.5	21	3	12	8
30310-18F	M18 x 1.5	23	4	12	8
30310-20F	M20 x 1.5	25	4	14	10
30310-22F	M22 x 1.5	27	4	14	10
30310-24F	M24 x 1.5	29	4	14	12
30310-26F	M26 x 1.5	31	4	16	12
30310-27F	M27 x 2	32	4	16	12
30310-30F	M30 x 1.5	36	4	16	17
30310-33F	M33 x 2	39	5	16	17
30310-42F	M42 x 2	49	5	16	22
30310-48F	M48 x 2	55	5	16	24