

H-692231.A

通气塞

材料

- 主体-铝6061-T6,原色光亮的表面处理.
- 通气帽-镀锌钢.

螺纹密封环

- 铝AL1060.(基于DIN 7603 A 标准).

最高连续工作温度

- -40° C ~ 250° C.

可按需提供的增值附件

- 按需求替换材质.
- 按需求增加测油杆.

技术特性

- H-692231.A通气过滤阀用于微压箱体内部与外界空气进行交互的作用,帽子可以有效防止污垢灰尘进入箱体.

Vent Plugs

Material

- Body – Al6061–T6 , mill finished.
- Breather cap – Steel zinc plated .

Thread gasket

- Aluminum Al1060.(Sealing DIN 7603A).

Maximum continuous working temperature


- -40° C~250° C.

Accessories on request

- Other materials .
- Add with the dipstick.

Technical Characteristics

- Vent plugs H-692231.A are used when the air exchange is to be allowed between the inside of the container and the ambient air.the cap can be prevents dirt or dust getting inside the box.

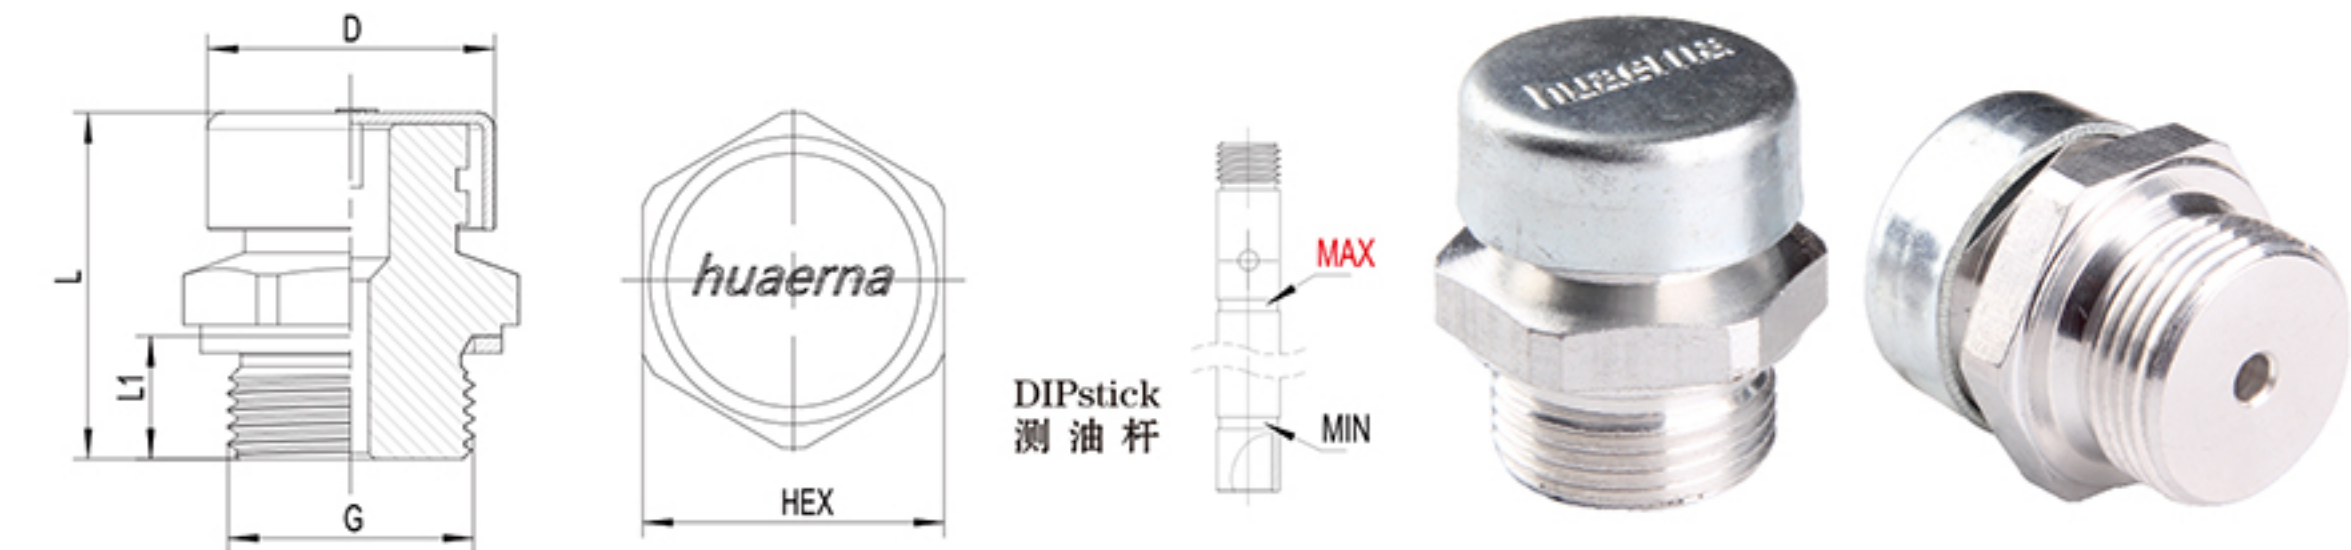

Part No.	G	D	L	L1	HEX
692231.A-6L	BSP 1/4"	15	24	8	17
692231.A-9L	BSP 3/8"	18	28	9	22
692231.A-12L	BSP 1/2"	26	31	11	27
692231.A-16L	BSP 3/4"	29	32	11	32
692231.A-22L	BSP 1"	38	39	14	40

Part No.	G	D	L	L1	HEX
692231.A-10F	M10x1.0	13	24	8	14
692231.A-12F	M14x1.5	15	28	9	17
692231.A-16F	M16x1.5	18	29	10	22
692231.A-18F	M18x1.5	18	29	10	22
692231.A-20F	M20x1.5	22	31	11	24
692231.A-22F	M22x1.5	26	31	11	27
692231.A-24F	M24x1.5	29	31	11	30
692231.A-27F	M27x1.5	29	32	11	32
692231.A-33F	M33x1.5	38	39	14	40