

油位观察窗

材料

- 主体
- 铜，抛光镀铬的表面处理。

液位分割器

- 铜，与主体一体成型。

观察窗

- 钢化玻璃。

密封垫

- 玻璃密封圈:FKM,以绿色为主要颜色。
- 螺纹密封圈:FKM, 以绿色为主要颜色。

最高连续工作温度

- -20° C~180° C.

工作压力

- 最高的连续使用压力应低于2.0Mpa.
- 最高的瞬间压力应低于3.0Mpa.



Oil Sight Glass

Material

- Body-Brass, polished and chromium plated.
- Reflector-Brass, with the body is one part.

Window

- Tempered glass.

Thread gaske


- Rubber FKM gasket.

Maximum continuous working temperature

- -20° C-180° C.

Working pressure

- The working pressure should be lower than 2.0 Mpa.
- The Instantaneous pressure should be lower than 3.0 Mpa.

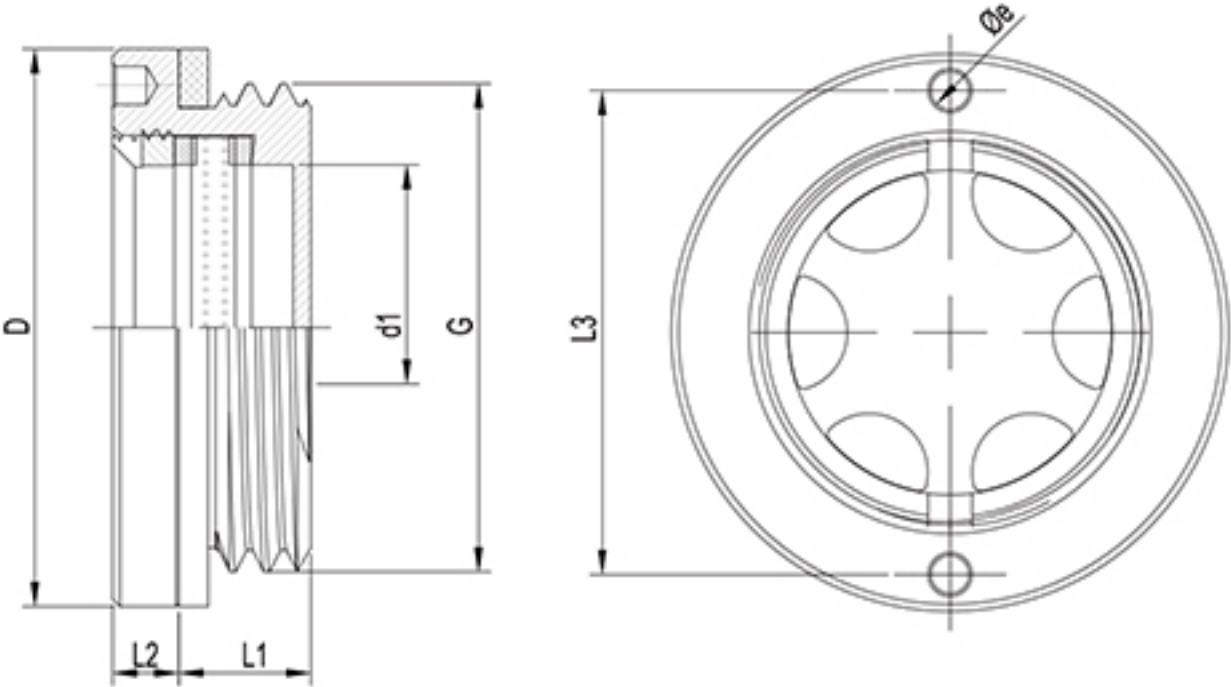

Part No.	G	D	d1	L2	L1	e	L3
SC-9L	G 3/8"	22	9.1	4	8	2.6	18
SC-12L	G 1/2"	26	11.6	4	8	2.6	21.5
SC-16L	G 3/4"	32	16.1	4	8	2.6	27
SC-22L	G 1"	38	22.1	4.5	9	2.6	33
SC-28L	G 1 1/4"	48	28.1	4.5	10	3.2	40
SC-33L	G 1 1/2"	55	33.1	5	11	3.2	47.5
SC-43L	G 2"	68	43.1	5.5	11	4.5	60

Part No.	G	D	d1	L2	L1	e	L3
SC-16F	M16x1.5	22	9.1	4	8	2.6	18
SC-20F	M20x1.5	26	11.6	4	8	2.6	21.5
SC-27F	M27x1.5	32	16.1	4	8	2.6	27
SC-30F	M30x1.5	36	20.1	4.5	8.5	2.6	30.5
SC-33F	M33x1.5	38	22.1	4.5	9	2.6	33
SC-36F	M36x1.5	42	25.1	4.5	9	2.6	35.5
SC-42F	M42x1.5	48	28.1	4.5	10	3.2	40
SC-48F	M48x1.5	55	33.1	5	11	3.2	47.5
SC-60F	M60x1.5	68	43.1	5.5	11	4.5	60